

Due


- Glass tiles
- 10x10 MOS
- Suitable for internal wall applications

97
COLOURS

1
FINISH


1
TILE SIZE

GRESTEC.CO.UK / 0345 130 2241

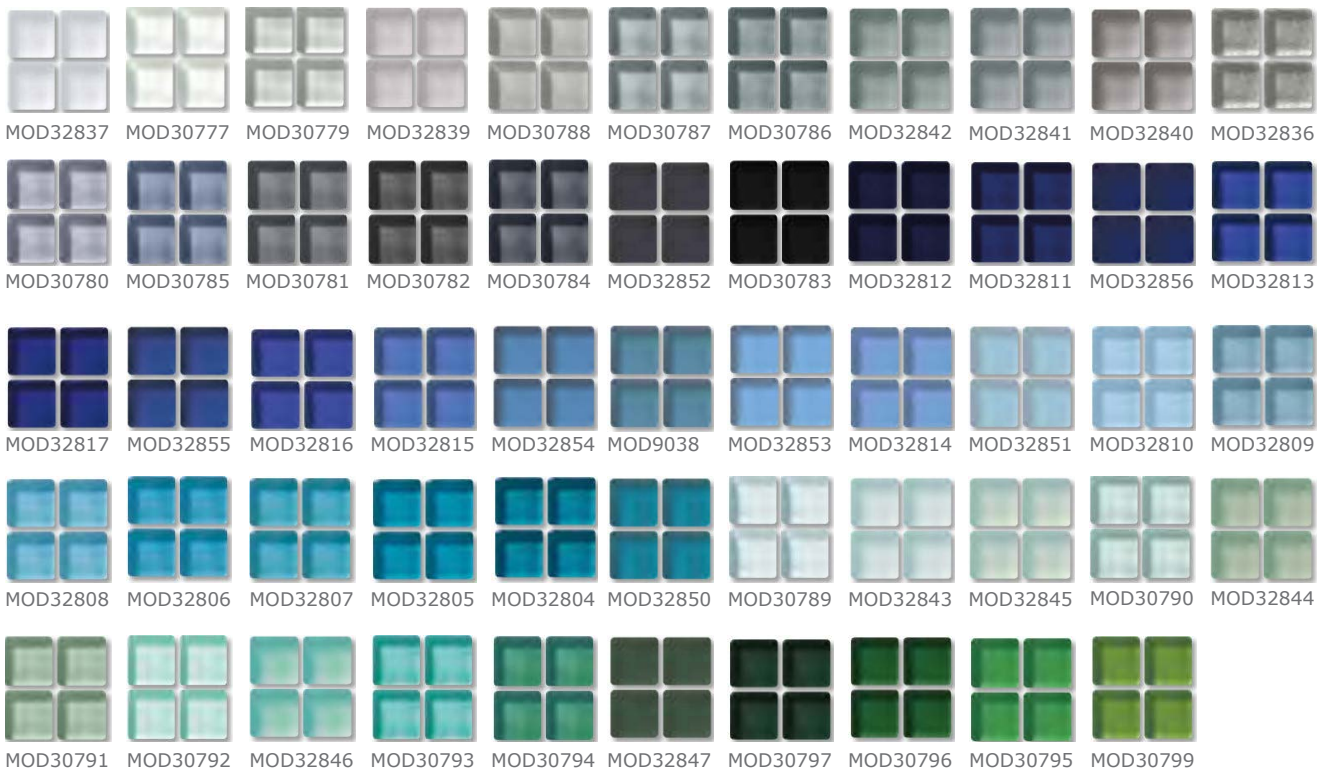

1

	SIZES (MM)	MESH-BACK SHEET
1	10x10	327x327



Due

- Glass tiles
- 10x10 MOS
- Suitable for internal wall applications

97
COLOURS


1
FINISH

1
TILE SIZE

GRESTEC.CO.UK / 0345 130 2241



	SIZES (MM)	THICKNESS	MESH-BACK SHEET
1	10x10	8MM	327x327



TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	None
Resistance to thermal shock	ISO 10545-9	Resistant
Frost resistance	ISO 10545-12	Resistant
Resistance to chemical products	ISO 10545-13	Resistant
Colour resistant to light	DIN 51094	Resistant
Lead and cadmium research	DIN 51094	Unaffected surface

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure. • Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Remove dust with a dry cloth • Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well

FIND US ON:

