


Material: **Porcelain** | Appearance: **Concrete effect** | Application: **Walls and Floors**



# Millan


A new interpretation within concrete look, that is minimalist and contemporary, with a material that offers high-level performances and a style suitable for architectural and interior designs. Millan collection comes in 5 colours, with cooler and warmer shades of grey and several sizes, with full continuity.



Shade variation: V2 moderate



## 10mm THK



TMKK32153  
**LRV: 54**



TMKK32154  
**LRV: 29**



TMKK32155  
**LRV: 12**



TMKK32156  
**LRV: 35**



TMKK32157  
**LRV: 22**

## 20mm THK



TMKK32153THK  
**LRV: 54**



TMKK32154THK  
**LRV: 29**







TMKK32157THK  
**LRV: 22**



LRV and PTV values can vary batch to batch, please contact for advice.  
Swatch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)


Find us on:    




# Millan



### Formats

Sizes (mm)	Thickness	 PTV Wet Slider 96	Colour availability
1 1200x2800	6mm	Brushed $\geq 25$ PTV	All colours
2 1200x1200	6mm	Brushed $\geq 25$ PTV	All colours
3 600x1200	6mm	Brushed $\geq 25$ PTV	All colours
4 900x900	20mm	Thick $\geq 36$ PTV	TMKK32153, 54
5 900x900	10mm	Brushed $\geq 25$ PTV Natural $\geq 36$ PTV	All colours All colours
6 450x900	10mm	Brushed $\geq 25$ PTV	All colours
7 600x600	10mm	Brushed $\geq 25$ PTV Natural $\geq 36$ PTV	All colours TMKK32153, 55, 56
8 600x600	20mm	Thick $\geq 36$ PTV	TMKK32154, 57
9 300x600	10mm	Brushed $\geq 25$ PTV Natural $\geq 36$ PTV	All colours All colours
10 75x380	10mm	Brushed $\geq 25$ PTV	All colours
11 100x100	10mm	Brushed $\geq 25$ PTV	All colours
12 30x30 MOS on 300x300 MESH	10mm	Brushed $\geq 25$ PTV Natural $\geq 36$ PTV	All colours All colours
13 300x600 BRK-MOS	10mm	Brushed $\geq 25$ PTV	All colours
14 300x300 FRE 3D MOS (FRE)	10mm	Brushed $\geq 25$ PTV	All colours
15 50x600/900 SK	10mm	Brushed $\geq 25$ PTV	All colours
16 300x600 ST	10mm	Brushed $\geq 25$ PTV	All colours
17 300x600/ 450x900 ST THK	20mm	Thick $\geq 36$ PTV	All colours
18 340x900 ST	10mm	Brushed $\geq 25$ PTV	All colours
19 150x600x40 / 150x900x40 L-EDGING TILE	20mm	Thick $\geq 36$ PTV	All colours

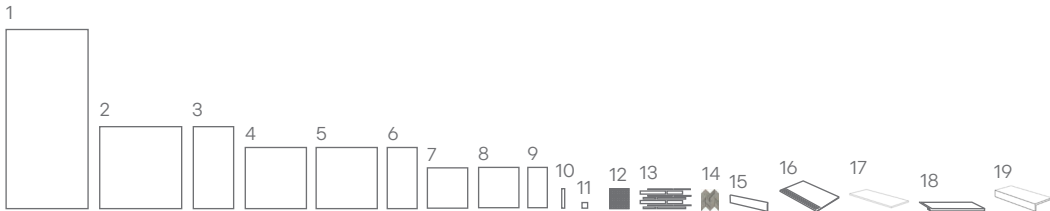

LRV and PTV values can vary batch to batch, please contact for advice.  
Swatch colours may vary, samples should be requested.





# Millan



Above  
TMKK32153, TMKK32154

Right  
TMKK32154



Above  
TMKK32157



# Millan

## Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Bending strength	Conforms
6	Scratch resistance	< 150 mm <sup>3</sup>
8	Coefficient of linear thermal expansion	<9MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	ULA-ULB
14	Stain resistance	Class 5
	Pendulum test - Slider 96 (Shod) Wet	Natural ≥36 PTV Brushed ≥25 PTV

## Sustainability information



## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.  
Product: Deterdek Pro

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.  
Product: Cleaner Pro

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.  
Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.