





Essenziale_1

Essenziale_1 showcases a series influenced by concrete, featuring a subdued colour scheme and a subtle texture, making it an ideal option for modern flooring. We stock PDCA51062, PDCA51063 and PDCA51064 in 600x600mm in our UK warehouse.



PDCA51062

LRV 48









600x600 UK stock



PDCA51064 LRV 12 600x600 UK stock




Shade variation: V2 moderate

PDCA51065 LRV 42




PDCA51066 LRV 32


Size (mm)		Thickness	PTV Wet Slider 96
1	600x1200	9	Natural ≥ 36 PTV
2	600x600	9	Natural ≥ 36 PTV Anti-slip ≥ 36 PTV
3	300x600	8	Natural ≥ 36 PTV Anti-slip ≥ 36 PTV
4	60x60 MOS on 300x300 MESH	8	Natural ≥ 36 PTV Anti-slip ≥ 36 PTV
5	300x600 ST	8	Natural ≥ 36 PTV
6	90x600 SK	8	Natural ≥ 36 PTV





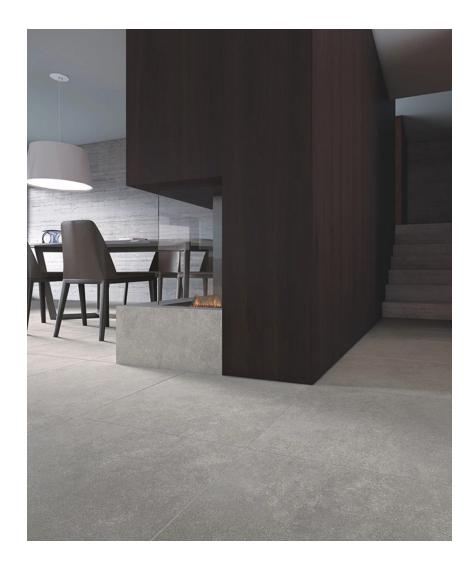

Essenziale_1

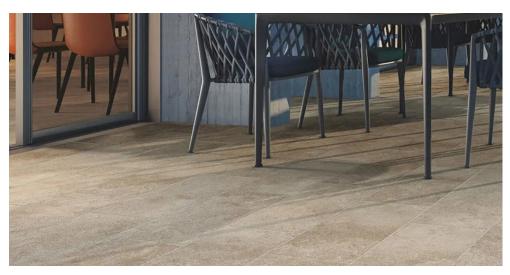

Above Floor: PDCA51065

Right Floor: PDCA51063





Above Floor: PDCA51065

Essenziale_1

Technical data sheet - ISO 10545 average values

2	Dimensional and surface quality	Very low tolerance
3	Water absorption	< 0,1%
4	Flexural strength	45 N/mm ²
6	Wear and abrasion resistance	≤ 150 mm³
8	Linear thermal expansion	6 x 10-6
	Frost resistance	Guaranteed
13	Chemical resistance	А
14	Stain resistance	Class 4 - 5
	Clour resistance to sunlight exposure DIN 51094	No change of colours
	Pendulum test (Shod) - Slider 96	NAT ≥36 PTV wet AS ≥36 PTV wet

Sustainability information





Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly. Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.