


Material: **Porcelain** | Appearance: **Terrazzo** | Application: **Walls and floors**



Shadox

Shadox technical porcelain stoneware tiles replicate the texture and effects of terrazzo with fragments of marble and quartz effect of different sizes blended within the slab.

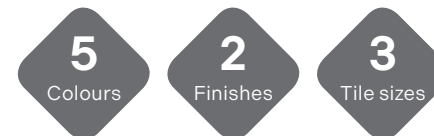

Shade variation: V2 moderate



Pddb54513
LRV: 54



Pddb54514
LRV: 20



Pddb54515
LRV: 12




Pddb54516
LRV: 35



Pddb54517
LRV: 30

Size (mm)	Thickness	PTV Wet Slider 96
1 600x1200	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV
2 600x600	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV
3 300x600	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV
4 300x600 / 300x1200 ST 1	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV
5 330x1200x40 ST2	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV
6 330x1200x40 ST3	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV
7 90x600 SK	9	Natural ≥ 36 PTV Hammered ≥ 36 PTV



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:

Material: **Porcelain** | Appearance: **Terrazzo** | Application: **Walls and floors**



Shadowx



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Shadowx

Technical data sheet - ISO 10545 average values

3	Water absorption	< 0,1%
4	Breaking strength	> 45 N/mm ²
6	Wear and abrasion resistance	≤ 150 mm ³
8	Linear thermal expansion	6 x 10 ⁻⁶
12	Frost proof	Resistant
13	Chemical resistance	A
14	Stain resistance	Guaranteed
	Pendulum test (Slider 96) Shod	NAT ≥36 PTV HAM R11 ≥36 PTV
	Recycled content	PDDB54513 ≥20% PDDB54514: 17% PDDB54515: 12% PDDB54516: 18% PDDB54517: 17%

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.