

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**

Vivaldo

Vivaldo reveals a series of porcelain tiles influenced by Ceppo di Gré, an Italian stone. Presented in three neutral tones, featuring either subtle flecks or a more refined speckle option. Vivaldo is suitable for both internal and external applications.



Shade variation: V4



AECB50532
AECB50532THK



AECB50533
AECB50533THK



AECB50534







Vivaldo AECB50532 AECB50534



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    






Vivaldo



Formats

	Sizes (mm)	> <	Finishes		
1	1200x1200	9mm	NAT R10 ≥36 PTV	-	-
2	600x1200	9mm	NAT R10 ≥36 PTV	AS R11 ≥36 PTV	-
3	600x1200 THK*	20mm	-	-	THK R11/C ≥42 PTV
4	600x600	9mm	NAT R10 ≥36 PTV	AS R11 ≥36 PTV	-
5	300x600	9mm	NAT R10 ≥36 PTV	-	-
6	145x498 CHEV L& R	9mm	NAT R10 ≥36 PTV	-	-
7	300x300	9mm	NAT R10 ≥36 PTV	-	-
8	MOS1 on 300x300 mesh	9mm	NAT R10 ≥36 PTV	-	-
9	MOS2 on 300x300 mesh	9mm	NAT R10 ≥36 PTV	-	-
10	MOS3 on 300x300 mesh	9mm	NAT R10 ≥36 PTV	-	-
11	MOS4 on 300x300 mesh	9mm	NAT R10 ≥36 PTV	-	-
12	SK 75x600	9mm	NAT R10 ≥36 PTV	-	-

* 20mm thick only available in AECB50532 and AECB50533

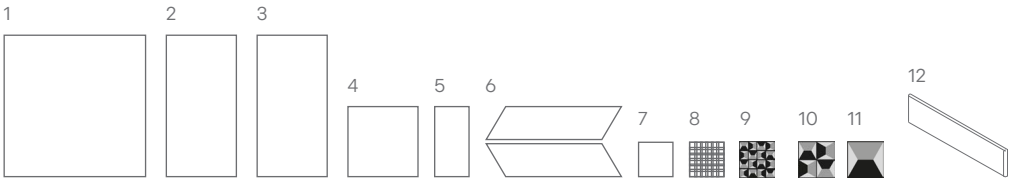

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod – Wet (unless stated). Swatch colours may vary, samples should be requested.

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**




Vivaldo



Above
Vivaldo AECB50534 AECB50532
AECB50531

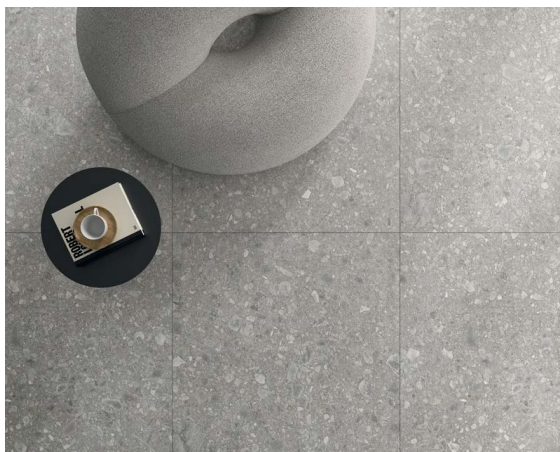


Right
Vivaldo AECB50533



Above
Vivaldo AECB50534

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Vivaldo

Technical data sheet - ISO 10545 average values

3	Water absorption	0,05%
4	Breaking strength	1.800 N 9mm 13.600 N 20mm
6	Resistance to deep abrasion	145 mm ³
8	Linear thermal expansion	$\alpha \leq 7 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
12	Frost resistance	Resistant
13	Chemical resistance	LA—HA Resistant
14	Stain resistance	Class 5
	Slip resistance	NAT R10 AS R11 THK R11/C
	Pendulum test - Slider 96 (wet)	NAT ≥ 36 PTV AS ≥ 36 PTV THK ≥ 42 PTV
	Shade variation	V4

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.