

Material: **Porcelain** | Appearance: **Slate** | Application: **Walls and floors**



Beno


Beno captures the raw power and timeless beauty of nature. Defined by striking contrasts and captivating graphic detail, this series takes inspiration from the essence of slate stone, transforming it into an exquisite expression of art. With its dynamic veins and rich hues, Beno delivers a regal and sophisticated aesthetic. It is offered in four unique color variations and a wide range of sizes, including 1200x2800mm slabs, making it an ideal choice for interior spaces.



Shade variation: V4 extreme



ICDC47993



ICDC47994



ICDC47995



ICDC47996



Beno ICDC47993 ICDC47996



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    




Beno



Formats

Sizes (mm)		> <	Finishes	
1	1200x2800	6mm	-	LAP
2	600x1200	8.8mm	NAT R10 ≥40 PTV	LAP
3	600x600	8.8mm	NAT R10 ≥40 PTV	LAP
4	300x600	8.8mm	NAT R10 ≥40 PTV	LAP
5	50x50 mos on 300x300	8.8mm	NAT R10 ≥40 PTV	-
6	Stick mos 300x600	8.8mm	NAT R10 ≥40 PTV	-
7	Muretto 300x600	8.8mm	NAT R10 ≥40 PTV	-
8	330x1200x32 ST	8.8mm	NAT R10 ≥40 PTV	-
9	330x1200x32 ST CORNER L&R	8.8mm	NAT R10 ≥40 PTV	-
10	70x600 SK	8.8mm	NAT R10 ≥40 PTV	-

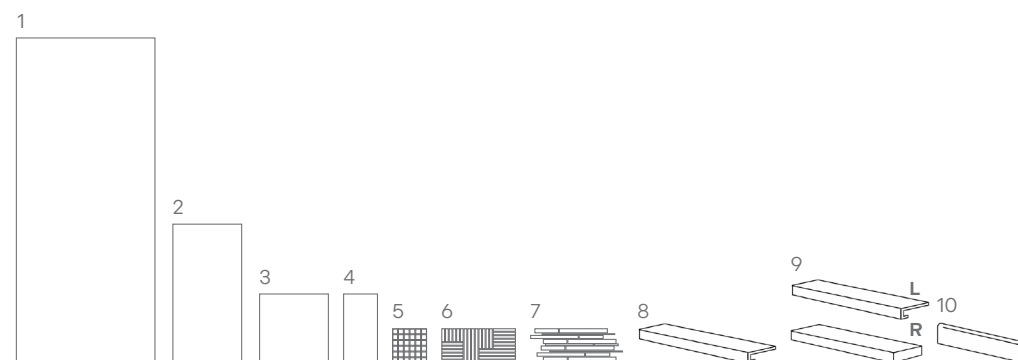

Material: **Porcelain** | Appearance: **Slate** | Application: **Walls and floors**




Beno



Above
Beno ICDC47995

Right
Beno ICDC47994

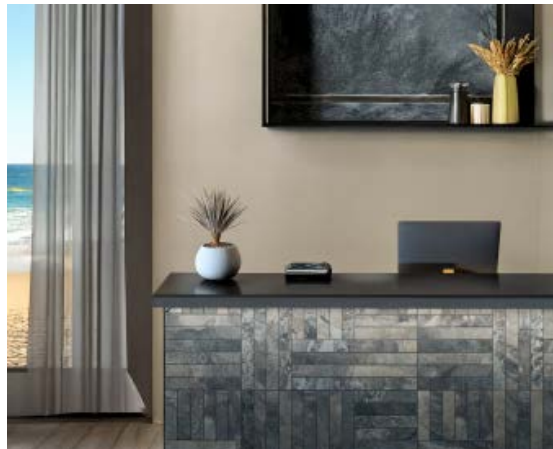

Above
Beno ICDC47996

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Switch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Beno

Technical data sheet - ISO 10545 average values

2	Dimensional and surface quality	Conforms
3	Water absorption	Conforms
4	Modulus of rupture Breaking strength	Conforms
8	Linear thermal expansion	$\alpha \leq 7.1 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	LA – HA
14	Stain resistance	Conforms
	Clour resistance to sunlight exposure DIN 51094	No variations
	Slip resistance DIN 51094	NAT R10
	Pendulum test - Slider 96 (Shod) wet	NAT ≥ 40 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.